![awp Austral Wire Products — 100% Australian Family Owned Company]

GalMAX FENCING

MORE GAL – MORE LIFE!

MANUFACTURED IN AUSTRALIA

HEAVILY GALVANISED
FOR EXTENDED LIFE

PHONE 1300 384 981

PRODUCT CATALOGUE

Manufactured by
Austral Wire Products
Sydney, Australia   A.B.N. 50 074 508 213

GALMAX FENCING

MORE GAL, MORE LIFE

For over 20 years Austral Wire Products, a 100% Australian owned company, has manufactured a diverse range of rural fencing products and has earned a reputation of being a quality focused and reliable supplier to the rural industry. We are proud to present the GalMAX Fencing product range, which includes:

- Pro-Tough
- Max-Loc
- Hinged Joint
- Barbed Wire
- Wire Netting
- Fencing Wire
- Trellis Wire

GalMAX Fencing is a premium range of heavily galvanised fencing , specially designed to withstand the harsh conditions of the Australian rural landscape.

Manufactured in Australia, GalMAX Fencing fully complies with Australian Standards AS2423-2002. GalMAX Fencing heavily galvanised wire products have up to 5 times coating thickness than that of standard galvanised wires and all GalMAX Fencing products are presented with quality and highly-visible labelling.

Production Equipment
Austral Wire Products uses modern specialised world class high production machinery that features the latest and best technology available for the manufacture of rural wire fencing products.

Testing
State of the art testing equipment in our laboratory is used to ensure a consistent and accurate tensility of every coil of wire used in our manufacturing process. This quality procedure, combined with close attention to detail in the manufacturing process, guarantees GalMAX Fencing supplies a superior quality long-lasting fence suited to the tough Australian conditions.

Availability
Austral Wire Products solely distributes the GalMAX Fencing products through Australian re-sellers. GalMAX Fencing does not supply to non-bonafide resellers.

CONTENTS

Catalogue Edition: JANUARY 2026

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

HEAVILY GALVANISED FOR EXTENDED LIFE

PRO-TOUGH FIELD FENCE
ULTIMATE & FERAL BLOC

MANUFACTURED IN AUSTRALIA

PRO·TOUGH®
BRUTE STRENGTH

THE *ULTIMATE* FENCE

One of the toughest wire fences Australia has ever seen.

The all-new Pro-Tough fence range supplied by GalMAX comes with the renowned strength of the Fixed Knot construction, together with the heavier wires, to make this one of the toughest wire fences.

The distinctive features of the Pro-Tough fence include:

- The high tensile top and bottom wires are 3mm thick, combined with 2.5mm high tensile picket wires and 2.5mm high tensile line wires – the strongest combination of wires supplied by GalMAX.

- Tension crimps in the line wires provide for a greater expansion and contraction of the fence in extreme temperatures. This also allows for heavy impact from animals, resulting in a much more resilient fence that retains tension.

- The fixed knot is wrapped around both the line and picket wires, allowing for improved movement and better flow across undulating ground.

- The single vertical, high tensile picket wire adds a stiffness to the product, allowing fence posts to be spaced further apart.

- All wires are heavily galvanised for extended life.

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

GalMAX FENCING
MORE GAL – MORE LIFE!

PRO-TOUGH FIELD FENCE
ULTIMATE & FERAL BLOC
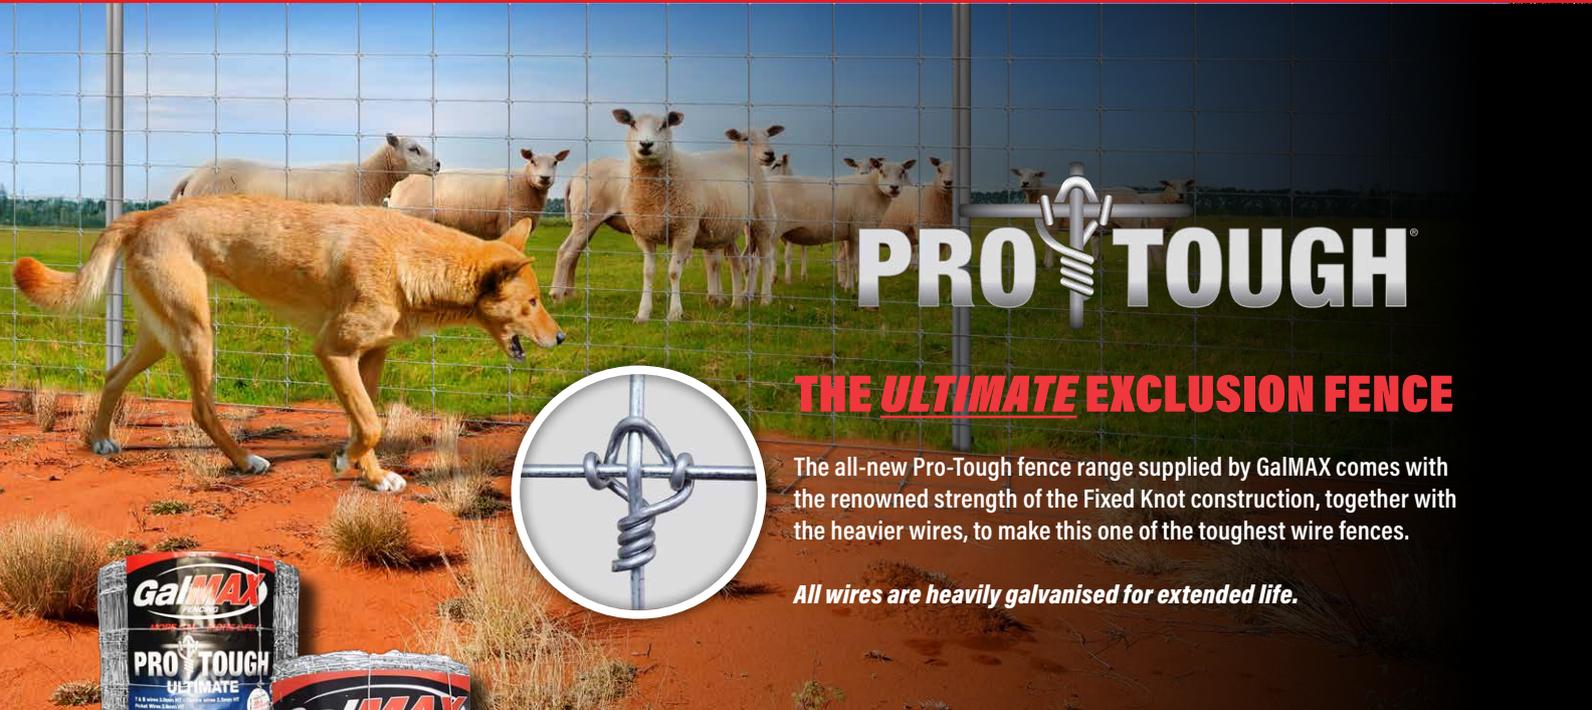
PRO TOUGH

THE *ULTIMATE* EXCLUSION FENCE

The all-new Pro-Tough fence range supplied by GalMAX comes with the renowned strength of the Fixed Knot construction, together with the heavier wires, to make this one of the toughest wire fences.

*All wires are heavily galvanised for extended life.*

PRO-TOUGH FIELD FENCE – ULTIMATE

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
350703	5 / 70 / 90	Sheep	500 m	134 kg	4 rolls
350705	6 / 70 / 30	Sheep, Lamb	200 m	82 kg	9 rolls
350710	6 / 90 / 30	Cattle	200 m	88 kg	9 rolls
350713	6 / 90 / 30	Cattle	400 m	175 kg	4 rolls
350715	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	200 m	97 kg	9 rolls
350720	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	400 m	195 kg	4 rolls
350740	8 / 90 / 30	Boundary, All Stock	200 m	108 kg	9 rolls
350745	8 / 90 / 30	Boundary, All Stock	400 m	215 kg	4 rolls
350735	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	100 m	74 kg	5 rolls
350736	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	250 m	186 kg	4 rolls

PRO-TOUGH FIELD FENCE – FERAL BLOC

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
350587	13 / 115 / 15	Wild Dogs, Pigs, Wallabies	100 m	105 kg	9 rolls
350588	13 / 115 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	100 m	139 kg	9 rolls
350555	13 / 115 / 15	Wild Dogs, Pigs, Wallabies	250 m	280 kg	4 rolls
350560	13 / 115 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	347 kg	4 rolls
350590	15 / 150 / 15	Wild Dogs, Pigs, Wallabies, Roos, Deer	100 m	133 kg	9 rolls
350591	15 / 150 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies, Roos, Deer	100 m	161 kg	5 rolls
350600	15 / 150 / 15	Wild Dogs, Pigs, Wallabies, Roos, Deer	250 m	335 kg	4 rolls
350605	15 / 150 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies, Roos, Deer	250 m	401 kg	4 rolls
350610	16 / 180 / 15	Wild Dogs, Pigs, Wallabies, Roos, Deer	200 m	296 kg	4 rolls
350625	17 / 190 / 15	Wild Dogs, Pigs, Wallabies, Roos, Deer	100 m	158 kg	5 rolls
350630	17 / 190 / 30	Wild Dogs, Pigs, Wallabies, Roos, Deer	200 m	239 kg	5 rolls
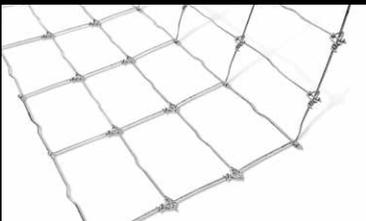
THE HINGED APRON
Exisiting fixed knot exclusion fences, with a forced apron effect, place increased stress on your fence posts. The ULTIMATE ProTough design includes the innovative hinged apron footer, which creates a true ground barrier that is built to handle extreme pressure without placing unnecessary tension on your fence posts.
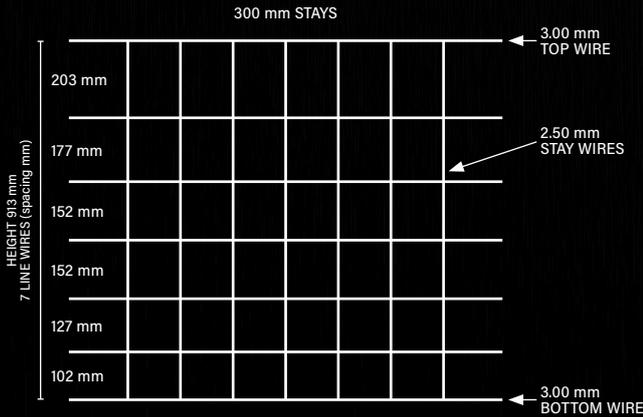
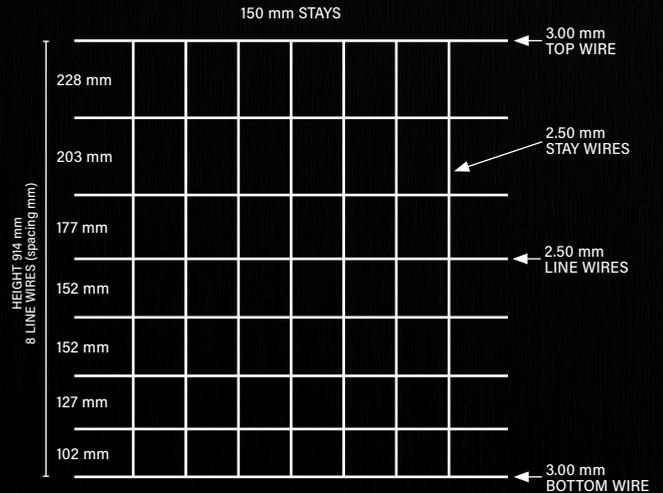*Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006*

HEAVILY GALVANISED FOR EXTENDED LIFE

PRO-TOUGH FIELD FENCE
LINE WIRE SPACINGS

MANUFACTURED IN AUSTRALIA

PRO-TOUGH ULTIMATE – 7 / 90 / 30
Graduated Line Wire Spacings
Purpose: *Sheep, Cattle, All Stock, Mixed Grazing*

300 mm STAYS

HEIGHT 913 mm — 7 LINE WIRES (spacing mm)

- 3.00 mm TOP WIRE
- 203 mm
- 177 mm
- 2.50 mm STAY WIRES
- 152 mm
- 152 mm
- 127 mm
- 102 mm
- 3.00 mm BOTTOM WIRE

PRO-TOUGH ULTIMATE – 8 / 90 / 15
Graduated Line Wire Spacings
Purpose: *Sheep, Cattle, Goats, Pigs*

150 mm STAYS

HEIGHT 914 mm — 8 LINE WIRES (spacing mm)

- 3.00 mm TOP WIRE
- 228 mm
- 203 mm
- 2.50 mm STAY WIRES
- 177 mm
- 152 mm
- 2.50 mm LINE WIRES
- 152 mm
- 127 mm
- 102 mm
- 3.00 mm BOTTOM WIRE

PRO-TOUGH FERAL BLOC – 15 / 150 / 15 WITH FOOTER
Graduated Line Wire Spacings
Purpose: *Wild Dogs, Pigs, Wallabies, Kangaroos, Deer*

150 mm STAYS

HEIGHT 1501 mm — 15 LINE WIRES (spacing mm)

- 3.00mm TOP WIRE
- 178 mm
- 178 mm
- 2.50 mm STAY WIRES
- 127 mm
- 102 mm
- 102 mm
- 102 mm — 2.50 mm LINE WIRES
- 102 mm
- 102 mm
- 102 mm
- 102 mm
- 76 mm
- 76 mm
- 76 mm
- 76 mm
- 3.00 mm BOTTOM WIRE
- 102 mm
- 102 mm
- 102 mm

PRO-TOUGH FERAL BLOC – 16 / 180 / 15
Graduated Line Wire Spacings
Purpose: *Wild Dogs, Pigs, Wallabies, Kangaroos, Deer*
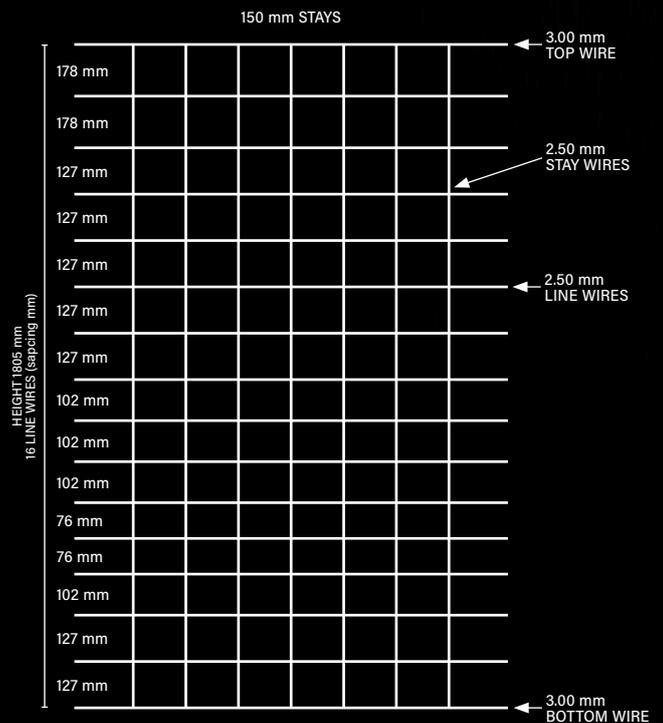
150 mm STAYS

HEIGHT 1805 mm — 16 LINE WIRES (saipcing mm)

- 3.00 mm TOP WIRE
- 178 mm
- 178 mm
- 2.50 mm STAY WIRES
- 127 mm
- 127 mm
- 127 mm
- 127 mm — 2.50 mm LINE WIRES
- 127 mm
- 127 mm
- 102 mm
- 102 mm
- 102 mm
- 76 mm
- 76 mm
- 102 mm
- 127 mm
- 127 mm
- 3.00 mm BOTTOM WIRE

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006
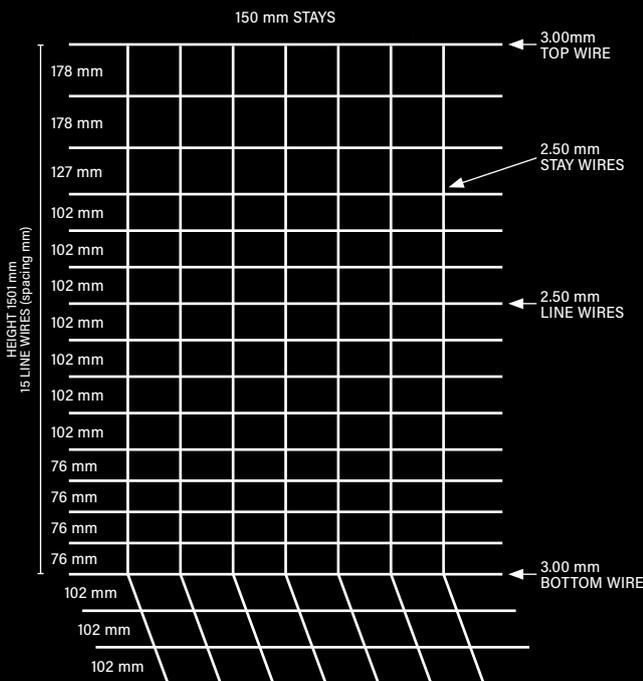
MAX-LOC FIELD FENCE
TRADITIONAL

MANUFACTURED IN AUSTRALIA
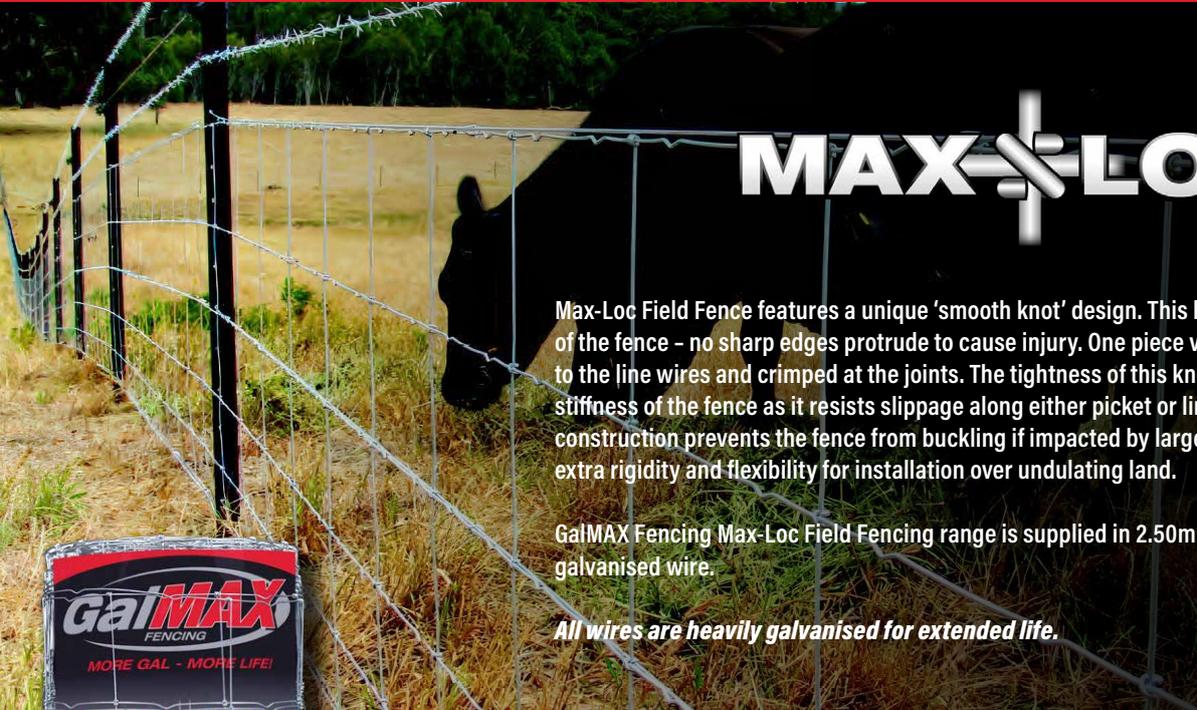
MAX✛LOC

Max-Loc Field Fence features a unique 'smooth knot' design. This knot is smooth either side of the fence – no sharp edges protrude to cause injury. One piece vertical pickets are ties to the line wires and crimped at the joints. The tightness of this knot crimp enhances the stiffness of the fence as it resists slippage along either picket or line wires. This tough, durable construction prevents the fence from buckling if impacted by larger animals, yet also provides extra rigidity and flexibility for installation over undulating land.

GalMAX Fencing Max-Loc Field Fencing range is supplied in 2.50mm high tensile heavily galvanised wire.

All wires are heavily galvanised for extended life.

MAX-LOC FIELD FENCE – TRADITIONAL

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300703	5 / 70 / 30	Sheep	200 m	61 kg	9 rolls
300705	6 / 70 / 30	Sheep, Lamb	200 m	69 kg	9 rolls
300710	6 / 90 / 30	Cattle	200 m	74 kg	9 rolls
300715	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	200 m	83 kg	9 rolls
300717	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	500 m	208 kg	4 rolls
300718	7 / 90 / 45	Sheep, Cattle, All Stock, Mixed Grazing	200 m	75 kg	9 rolls
300740	8 / 90 / 30	Boundary, All Stock	200 m	92 kg	9 rolls
300725	8 / 115 / 30	Sheep, Cattle, Goats	200 m	98 kg	9 rolls
300730	8 / 80 / 15	Sheep, Cattle, Goats, Pigs	100 m	58 kg	9 rolls
300735	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	100 m	61 kg	9 rolls
300738	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	250 m	157 kg	4 rolls
300720	8 / 115 / 15	Sheep, Cattle, Goats, Pigs, Dogs	100 m	67 kg	9 rolls
300701	11 / 142 / 15	All Stock	100 m	88 kg	9 rolls

"Unique smooth knot design"

SIZE DESCRIPTION EXAMPLES
8 / 90 / 15 = 8 horizontal (line) wires
90 cm fence height
15 cm vertical (picket) wire spacings

6 / 70 / 30 = 6 horizontal (line) wires
70 cm fence height
30 cm vertical (picket) wire spacings

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

HEAVILY GALVANISED FOR EXTENDED LIFE

GalMAX FENCING

MORE GAL – MORE LIFE!

MANUFACTURED IN AUSTRALIA

MAX-LOC FIELD FENCE
PREMIUM

MAX-LOC

The GalMAX Max-Loc Premium range has the same features as Max-Loc Traditional with the additional strength of 2.80mm top and bottom line wires.

All wires are heavily galvanised for extended life.

MAX-LOC FIELD FENCE – PREMIUM

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300760	6 / 70 / 30	Sheep, Lamb	200 m	73 kg	9 rolls
300763	6 / 70 / 30	Sheep, Lamb	500 m	180 kg	4 rolls
300765	6 / 90 / 30	Cattle	200 m	78 kg	9 rolls
300766	6 / 90 / 30	Cattle	500 m	204 kg	4 rolls
300770	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	200 m	87 kg	9 rolls
300773	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	500 m	218 kg	4 rolls
300774	7 / 90 / 45	Sheep, Cattle, All Stock, Mixed Grazing	500 m	194 kg	4 rolls
300780	8 / 90 / 30	Boundary, All Stock	200 m	96 kg	9 rolls
300750	8 / 90 / 30	Boundary, All Stock	500 m	238 kg	4 rolls
300775	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	100 m	65 kg	9 rolls
300777	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	250 m	154 kg	4 rolls
300772	7 / 90 / 30 + FOOTER		500 m	310 kg	4 rolls
300739	8 / 90 / 15 + FOOTER		250 m	220 kg	4 rolls
300745	8 / 90 / 30 + FOOTER		200 m	133 kg	9 rolls
300785	8 / 90 / 30 + FOOTER		500 m	331 kg	4 rolls

SIZE DESCRIPTION EXAMPLES

6 / 70 / 30 = 6 horizontal (line) wires
70 cm fence height
30 cm vertical (picket) wire spacings

7 / 90 / 30 = 7 horizontal (line) wires
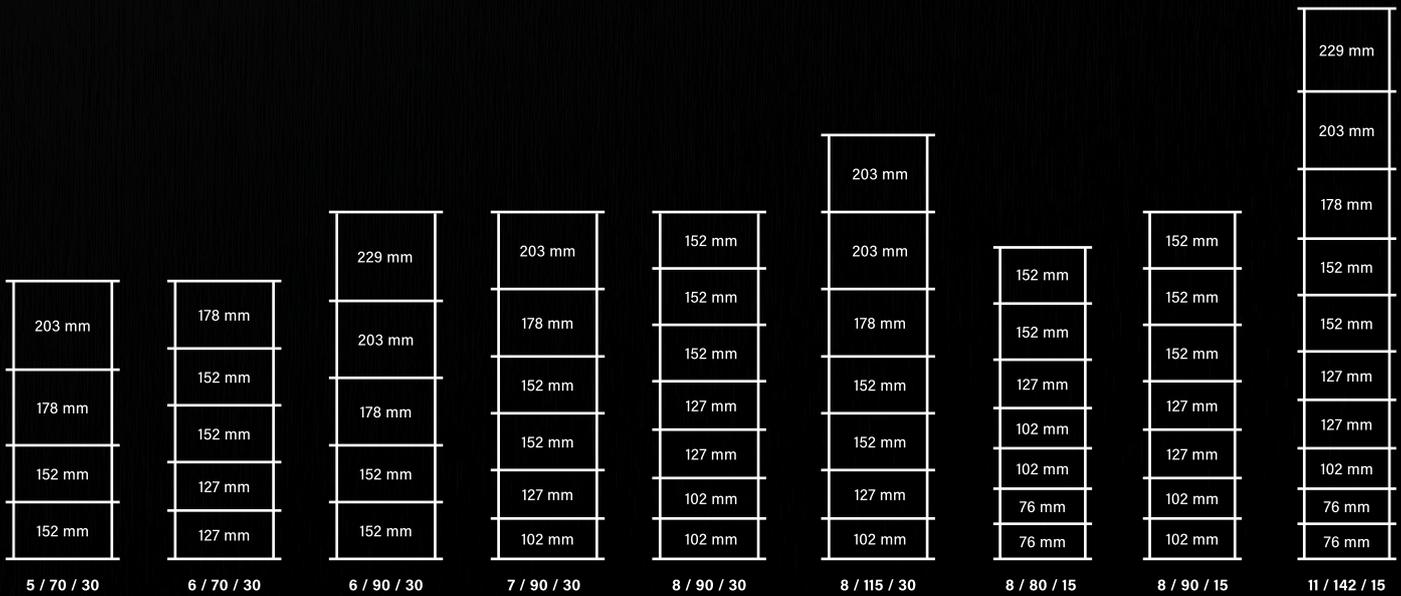90 cm fence height
30 cm vertical (picket) wire spacings

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

MAX-LOC FIELD FENCE
LINE WIRE SPACINGS

MAX-LOC FIELD FENCE – TRADITIONAL

5 / 70 / 30
- 203 mm
- 178 mm
- 152 mm
- 152 mm

6 / 70 / 30
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm

6 / 90 / 30
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 152 mm

7 / 90 / 30
- 203 mm
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 102 mm

8 / 90 / 30
- 152 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 102 mm

8 / 115 / 30
- 203 mm
- 203 mm
- 178 mm
- 152 zinc
- 152 mm
- 127 mm
- 102 mm

8 / 80 / 15
- 152 mm
- 152 mm
- 127 mm
- 102 mm
- 102 mm
- 76 mm
- 76 mm

8 / 90 / 15
- 152 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 102 mm

11 / 142 / 15
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 76 mm
- 76 mm

MAX-LOC FIELD FENCE – PREMIUM

6 / 70 / 30
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm

6 / 90 / 30
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 152 mm

7 / 90 / 30
- 203 mm
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 102 mm

7 / 90 / 45
- 203 mm
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 102 mm

8 / 90 / 30
- 152 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 102 mm

8 / 90 / 15
- 152 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 102 mm

7 / 90 / 30 WITH FOOTER
- 203 mm
- 178 mm
- 152 mm
- 152 mm
- 127 mm
- 102 mm
- 102 mm
- 102 mm
- 102 mm

8 / 90 / 15 WITH FOOTER
- 152 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 102 mm
- 102 mm
- 102 mm
- 102 mm

8 / 90 / 30 WITH FOOTER
- 152 mm
- 152 mm
- 152 mm
- 127 mm
- 127 mm
- 102 mm
- 102 mm
- 102 mm
- 102 mm
- 102 mm

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

MAX-LOC FIELD FENCE
HORSE FENCE

Max-Loc Horse Fence features a special smooth knot design. This design helps keep valuable animals safe from injury. The small aperture vertical mesh stops horses from stepping through or walking down the fence. The GalMAX Fencing Max-Loc Field Fencing range uses 2.50mm high tensile, heavily galvanised wire.

All wires are heavily galvanised for extended life.

MAX-LOC FIELD FENCE – HORSE FENCE

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300560	10 / 90 / 5	Horse	50 m	74 kg	5 rolls
300545	10 / 90 / 5	Horse	100 m	143 kg	4 rolls
300565	13 / 122 / 5	Horse	50 m	96 kg	5 rolls
300556	13 / 122 / 5	Horse	100 m	187 kg	4 rolls
300570	16 / 150 / 5	Horse	30 m	70 kg	9 rolls
300575	19 / 183 / 5	Horse	30 m	83 kg	9 rolls

SIZE DESCRIPTION EXAMPLES
13 / 122 / 5 = 13 horizontal (line) wires
122 cm fence height
5 cm vertical (picket) wire spacings

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

MAX-LOC FIELD FENCE
FERAL BLOC

MANUFACTURED IN AUSTRALIA

MAX+LOC

Max-Loc Feral Bloc pre-fabricated fence is offered in both a constant size mesh and graduated mesh spacings. Graduated mesh spacing prevent smaller animals penetrating the fence. Both style fences provide an impact resistant barricade against marsupials such as wallabies and kangaroos, also dogs, pigs and feral animals.

GalMAX Fencing Max-Loc Field Fencing range is supplied in 2.50mm high tensile heavily galvanised wire.

All wires are heavily galvanised for extended life.

FERAL BLOC GRADUATED LINE WIRE SPACINGS

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300581	11 / 90 / 15	Wild Dogs, Pigs, Wallabies	100 m	75 kg	9 rolls
300580	11 / 90 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	100 m	94 kg	9 rolls
301500	11 / 90 / 15	Wild Dogs, Pigs, Wallabies	250 m	183 kg	4 rolls
301510	11 / 90 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	236 kg	4 rolls
300583	13 / 90 / 15	Wild Dogs, Pigs, Wallabies	100 m	85 kg	9 rolls
300584	13 / 90 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	100 m	104 kg	9 rolls
301530	13 / 90 / 15	Wild Dogs, Pigs, Wallabies	250 m	207 kg	4 rolls
301545	13 / 90 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	266 kg	4 rolls
300587	13 / 115 / 15	Wild Dogs, Pigs, Wallabies	100 m	91 kg	9 rolls
300588	13 / 115 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	100 m	115 kg	9 rolls
301555	13 / 115 / 15	Wild Dogs, Pigs, Wallabies	250 m	227 kg	4 rolls
301560	13 / 115 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	282 kg	4 rolls
300590	15 / 150 / 15	Wild Dogs, Pigs, Wallabies	100 m	109 kg	9 rolls
300591	15 / 150 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	100 m	128 kg	9 rolls
301575	15 / 150 / 15	Wild Dogs, Pigs, Wallabies	250 m	267 kg	4 rolls
301580	15 / 150 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	336 kg	4 rolls
301490	10 / 110 / 15	Wild Dogs, Pigs, Wallabies	100 m	77 kg	9 rolls
301513	11 / 115 / 15	Wild Dogs, Pigs, Wallabies	100 m	84 kg	9 rolls
301515	11 / 115 / 15	Wild Dogs, Pigs, Wallabies	250 m	211 kg	4 rolls
301520	11 / 115 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	264 kg	4 rolls
301565	14 / 145 / 15	Wild Dogs, Pigs, Wallabies	250 m	258 kg	4 rolls
301583	15 / 150 / 15	Wild Dogs, Pigs, Wallabies	500 m	546 kg	2 rolls
301585	15 / 150 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	500 m	656 kg	2 rolls

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

HEAVILY GALVANISED FOR EXTENDED LIFE

MAX-LOC FIELD FENCE
FERAL BLOC

Max-Loc Feral Bloc pre-fabricated fence is offered in both a constant size mesh and graduated mesh spacings. Graduated mesh spacing prevent smaller animals penetrating the fence. Both style fences provide an impact resistant barricade against marsupials such as wallabies and kangaroos, also dogs, pigs and feral animals.

GalMAX Fencing Max-Loc Field Fencing range is supplied in 2.50mm high tensile heavily galvanised wire.

All wires are heavily galvanised for extended life.

FERAL BLOC – PREMIUM *(2.80 mm TOP & BOTTOM WIRES)*

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300544	6 / 51 / 15	Retrofit Apron	250m	109 kg	8 rolls
301577	15 / 150 / 15	Wild Dogs, Pigs, Wallabies	250 m	278 kg	4 rolls
301582	15 / 150 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	250 m	341 kg	4 rolls
301650	16 / 180 / 15	Wild Dogs, Pigs, Wallabies	250 m	316 kg	4 rolls
301587	15 / 150 / 15 + FOOTER	Wild Dogs, Pigs, Wallabies	500m	667 kg	2 rolls
301655	16 / 180 / 15	Wild Dogs, Pigs, Wallabies	500m	618 kg	2 rolls

FERAL BLOC CONSTANT MESH SPACINGS *(100 x 150 mm SPACINGS)*

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300585	13 / 122 / 15	Wild Dogs, Pigs	80 m	74 kg	9 rolls
300593	16 / 150 / 15	Wild Dogs, Pigs, Kangaroos	70 m	80 kg	9 rolls
300595	19 / 183 / 15	Kangaroos	60 m	82 kg	9 rolls

GalMAX
FENCING
MORE GAL - MORE LIFE!

MAX-LOC
FERAL BLOC
CONSTANT 100 x 150 MESH SIZE
Line wire - 2.5mm high tensile
Manufactured in Australia to Australian Standards.
All wires *heavily galvanised* for *longer* life.

No. of LINE WIRES	HEIGHT (CM)	PICKET SPACING (CM)	LENGTH (M)
13	122	15	80

WARNING
BEWARE OF RECOIL WHEN OPENING
100% Australian Owned
Manufactured by
Austral Wire Products
Sydney, Australia A.B.N. 00 000 000 000

SIZE DESCRIPTION EXAMPLES
13 / 122 / 15 = 13 horizontal (line) wires
122 cm fence height
15 cm vertical (picket) wire spacings

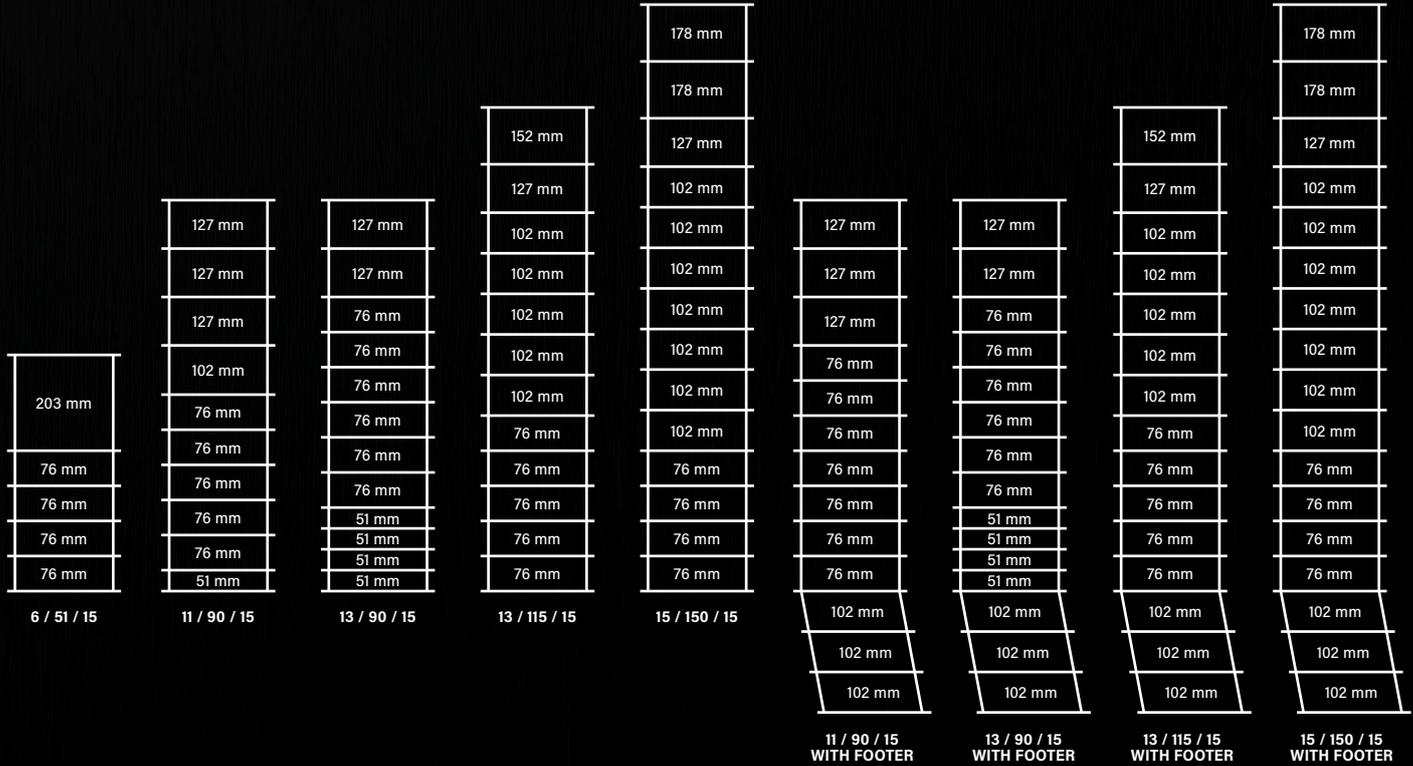*Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006*

MAX-LOC FIELD FENCE
LINE WIRE SPACINGS

MANUFACTURED IN AUSTRALIA

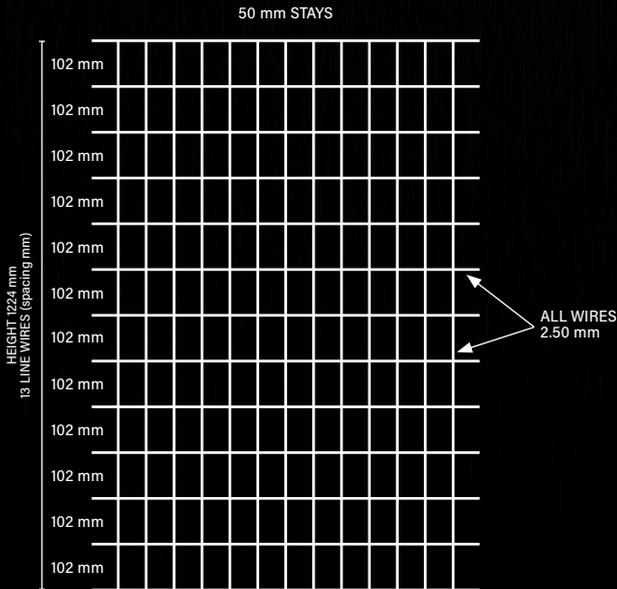## MAX-LOC FERAL BLOC – GRADUATED LINE WIRE SPACINGS

6 / 51 / 15
203 mm
76 mm
76 mm
76 mm

11 / 90 / 15
127 mm
127 mm
127 mm
102 mm
76 mm
76 mm
76 mm
76 mm
76 mm
51 mm

13 / 90 / 15
127 mm
127 mm
76 mm
76 mm
76 mm
76 mm
76 mm
76 mm
51 mm
51 mm
51 mm
51 mm

13 / 115 / 15
152 mm
127 mm
102 mm
102 mm
102 mm
102 mm
102 mm
76 mm
76 mm
76 mm
76 mm
76 mm

15 / 150 / 15
178 mm
178 mm
127 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
76 mm
76 mm
76 mm
76 mm

11 / 90 / 15 WITH FOOTER
127 mm
127 mm
127 mm
76 mm
76 mm
76 mm
76 mm
76 mm
76 mm
102 mm
102 mm
102 mm

13 / 90 / 15 WITH FOOTER
127 mm
127 mm
76 mm
76 mm
76 mm
76 mm
51 mm
51 mm
51 mm
51 mm
102 mm
102 mm
102 mm

13 / 115 / 15 WITH FOOTER
152 mm
127 mm
102 mm
102 mm
102 mm
102 mm
76 mm
76 mm
76 mm
76 mm
102 mm
102 mm
102 mm

15 / 150 / 15 WITH FOOTER
178 mm
178 mm
127 mm
102 mm
102 mm
102 mm
102 mm
102 mm
76 mm
76 mm
76 mm
76 mm
102 mm
102 mm
102 mm

MAX-LOC FERAL BLOC – CONSTANT MESH SPACINGS

13 / 122 / 15
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm

16 / 150 / 15
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm

19 / 183 / 15
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm

FERAL BLOC – 13 / 122 / 15
Constant Mesh Spacings
Purpose: *Wild Dogs, Pigs*
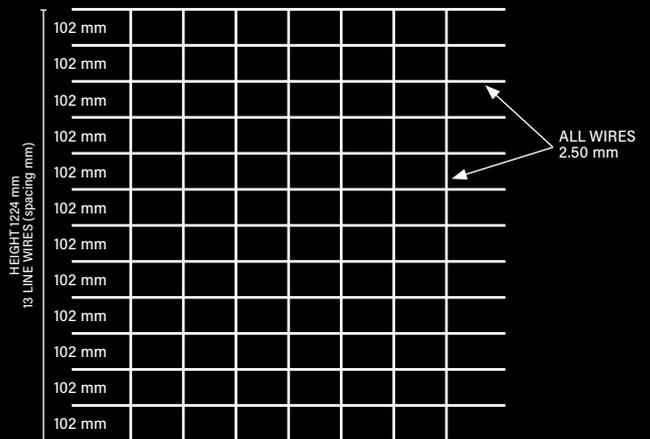
HEIGHT 1224 mm
13 LINE WIRES (spacing mm)

102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm
102 mm

ALL WIRES 2.50 mm

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

HEAVILY GALVANISED FOR EXTENDED LIFE
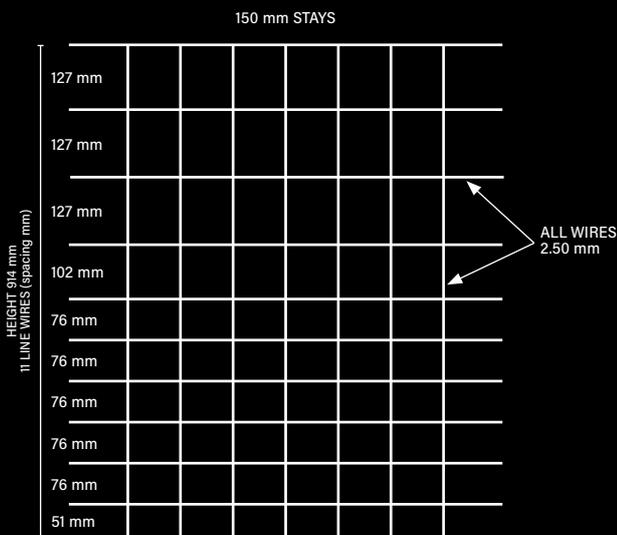
GalMAX
FENCING
MORE GAL – MORE LIFE!

MANUFACTURED IN AUSTRALIA

MAX-LOC FIELD FENCE
LINE WIRE SPACINGS

HORSE FENCE – 13 / 122 / 5
Constant Line Wire Spacings
Purpose: *Horses*

50 mm STAYS

| HEIGHT 1224 mm 13 LINE WIRES (spacing mm) |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |

ALL WIRES 2.50 mm

FERAL BLOC – 15 / 150 / 15 WITH FOOTER
Graduated Line Wire Spacings
Purpose: *Wild Dogs, Pigs, Kangaroos*

150 mm STAYS

| HEIGHT 1501 mm 15 LINE WIRES (spacing mm) |
| 178 mm |
| 178 mm |
| 127 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 102 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 102 mm |
| 102 mm |
| 102 mm |

ALL WIRES 2.50 mm

HINGED JOINT
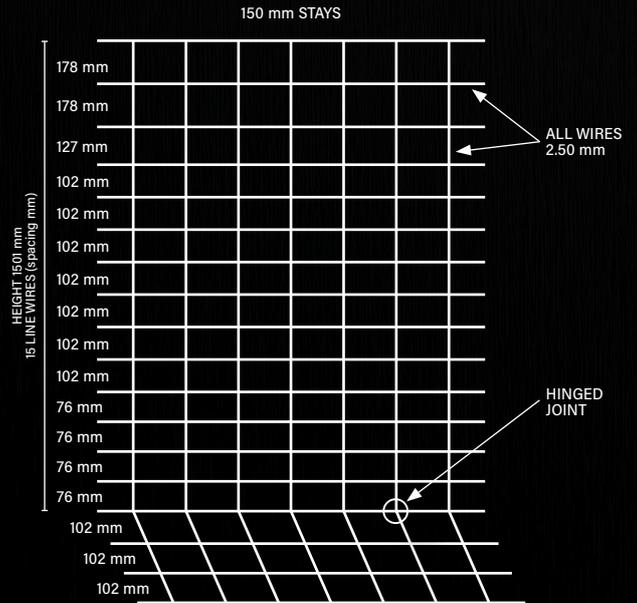
FERAL BLOC – 11 / 90 / 15
Graduated Line Wire Spacings
Purpose: *Wild Dogs, Pigs, Wallabies*

150 mm STAYS

| HEIGHT 914 mm 11 LINE WIRES (spacing mm) |
| 127 mm |
| 127 mm |
| 127 mm |
| 102 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 51 mm |

ALL WIRES 2.50 mm

FERAL BLOC – 13 / 90 / 15
Graduated Line Wire Spacings
Purpose: *Wild Dogs, Pigs, Wallabies*
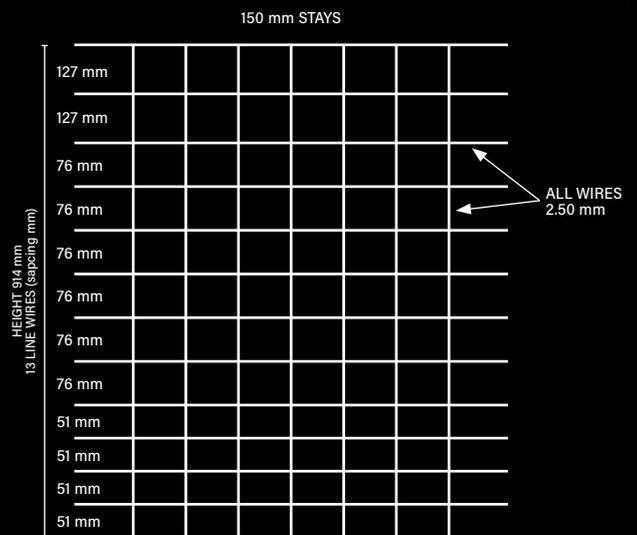
150 mm STAYS

| HEIGHT 914 mm 13 LINE WIRES (sapcing mm) |
| 127 mm |
| 127 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 76 mm |
| 51 mm |
| 51 mm |
| 51 mm |
| 51 mm |

ALL WIRES 2.50 mm

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

HINGED JOINT FIELD FENCE
TRADITIONAL

Hinged Joint fencing is the most popular pre-fabricated fence used globally.

The Hinged Joint allows the necessary flexibility to move without breaking wires when pressure is placed on the fence by stock.

All wires are heavily galvanised for extended life.

HINGED JOINT FIELD FENCE – TRADITIONAL

All line wires are high tensile 2.50 mm wires, and all vertical wires are soft 2.50 mm.

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300410	6 / 70 / 30	Sheep, Lamb	200m	76 kg	9 rolls
300415	6 / 90 / 30	Cattle	200 m	78 kg	9 rolls
300420	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	200 m	89 kg	9 rolls
300422	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	500 m	213 kg	4 rolls
300445	8 / 90 / 30	Boundary, All Stock	200 m	95 kg	9 rolls
300430	8 / 115 / 30	Sheep, Cattle, Goats	200 m	103 kg	9 rolls
300435	8 / 80 / 15	Sheep, Cattle, Goats, Pigs	100m	65 kg	9 rolls
300440	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	100 m	66 kg	9 rolls
300442	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	200 m	125 kg	5 rolls
300425	8 / 115 / 15	Sheep, Cattle, Goats, Pigs, Dogs	100 m	73 kg	9 rolls
300401	11 / 142 / 15	All Stock	100 m	93 kg	9 rolls

SIZE DESCRIPTION EXAMPLE
6 / 90 / 30 = 6 horizontal (line) wires
90 cm fence height
30 cm vertical (picket) wire spacings

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

GalMAX
FENCING

MORE GAL – MORE LIFE!

HINGED JOINT FIELD FENCE
PREMIUM

Hinged Joint fencing is the most popular pre-fabricated fence used globally.

The Hinged Joint allows the necessary flexibility to move without breaking wires when pressure is placed on the fence by stock.

All wires are heavily galvanised for extended life.

HINGED JOINT FIELD FENCE – PREMIUM

This range has the same features as traditional Hinged Joint but has the additional strength of 2.80mm top and bottom line wires, saving the need for top and bottom selvedge wires.

CODE	SIZE	PURPOSE	LENGTH	WEIGHT	PALLET QTY
300505	6 / 70 / 30	Sheep, Lamb	200 m	80 kg	9 rolls
300510	6 / 90 / 30	Cattle	200 m	80 kg	9 rolls
300515	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	200 m	93 kg	9 rolls
300520	7 / 90 / 30	Sheep, Cattle, All Stock, Mixed Grazing	500m	221 kg	4 rolls
300540	8 / 90 / 30	Boundary, All Stock	200 m	99 kg	9 rolls
300535	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	100 m	70 kg	9 rolls
300537	8 / 90 / 15	Sheep, Cattle, Goats, Pigs	200 m	131 kg	5 rolls

SIZE DESCRIPTION EXAMPLE
8 / 90 / 30 = 8 horizontal (line) wires
90 cm fence height
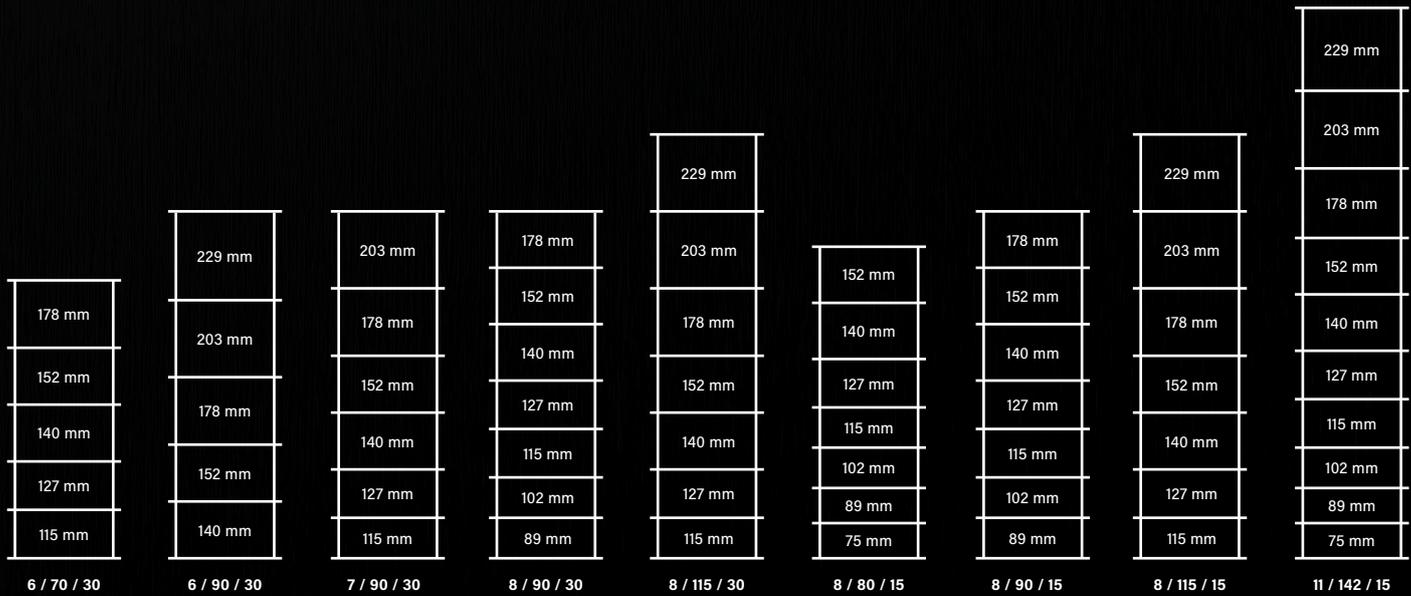30 cm vertical (picket) wire spacings

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

HINGED JOINT FIELD FENCE
LINE WIRE SPACINGS

MANUFACTURED IN AUSTRALIA

HINGED JOINT FIELD FENCE – TRADITIONAL

6 / 70 / 30
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

6 / 90 / 30
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 140 mm

7 / 90 / 30
- 203 mm
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

8 / 90 / 30
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm
- 102 mm
- 89 mm

8 / 115 / 30
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

8 / 80 / 15
- 152 mm
- 140 mm
- 127 mm
- 115 mm
- 102 mm
- 89 mm
- 75 mm

8 / 90 / 15
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm
- 102 mm
- 89 mm

8 / 115 / 15
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

11 / 142 / 15
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm
- 102 mm
- 89 mm
- 75 mm

HINGED JOINT FIELD FENCE PREMIUM

6 / 70 / 30
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

6 / 90 / 30
- 229 mm
- 203 mm
- 178 mm
- 152 mm
- 140 mm

7 / 90 / 30
- 203 mm
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

8 / 90 / 30
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm
- 102 mm
- 89 mm

8 / 90 / 15
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm
- 102 mm
- 89 mm
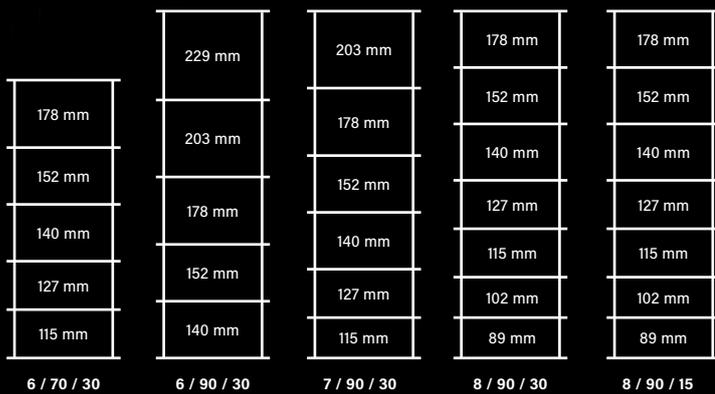
HINGED JOINT FIELD FENCE – 7 / 90 / 30
Graduated Line Wire Spacings
Purpose: *Sheep, Cattle, All Stock, Mixed Grazing*
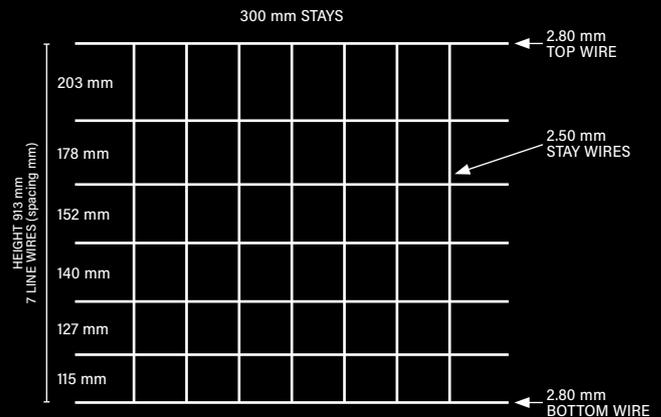
300 mm STAYS
- 203 mm
- 178 mm
- 152 mm
- 140 mm
- 127 mm
- 115 mm

HEIGHT 913 mm
7 LINE WIRES (spacing mm)

2.80 mm TOP WIRE
2.50 mm STAY WIRES
2.80 mm BOTTOM WIRE

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

GalMAX FENCING

**MORE GAL – MORE LIFE!**

WIRE NETTING

GalMAX Fencing Wire Netting is the answer to unwanted vermin and animals entering your farm, and has the following quality features:
- Reverse twist knot
- Double selvedge wires
- Consistent width throughout roll

All 1.4mm wires heavily galvanised for extended life.

WIRE NETTING

CODE	SIZE	LENGTH	WEIGHT	GAL. COATING	PALLET QTY
300630	30 / 4 / 1.4	100 m	31 kg	Heavy	18 rolls
300635	60 / 4 / 1.4	100 m	60 kg	Heavy	9 rolls
300650	90 / 4 / 1.4	100 m	86 kg	Heavy	9 rolls
300605	105 / 4 / 1.4	100 m	98 kg	Heavy	9 rolls
300640	90 / 4 / 1.4	50 m	43 kg	Heavy	16 rolls
300601	105 / 4 / 1.4	50 m	49 kg	Heavy	16 rolls
300665	120 / 4 / 1.4	50 m	50 kg	Heavy	16 rolls
300620	180 / 4 / 1.4	50 m	78 kg	Heavy	7 rolls
300625	180 / 4 / 1.4	100 m	157 kg	Heavy	5 rolls
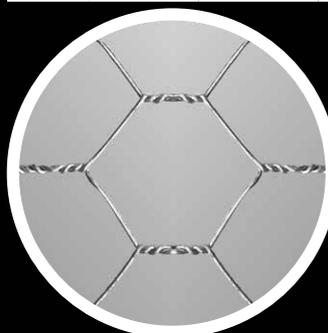
SIZE DESCRIPTION EXAMPLE
60 / 4 / 1.4 = 60 cm fence height
4 cm hole size
1.4 mm wire diameter

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

BARBED WIRE

MANUFACTURED IN AUSTRALIA

BARBED WIRE

GalMAX Fencing Barbed Wire comes with quality assurance a GalMAX Fencing Barbed Wire is available in High Tensile 1.57 mm, 1.80 mm and 2.00 mm wire diameter, and Iowa 2.50 mm wire diameter and is supplied on hardwood spools for easy unwinding.

All wires are heavily galvanised for extended life.

BARBED WIRE

CODE	TYPE	WIRE DIAMETER	BARB DIAMETER	LENGTH	GAL. COATING	WEIGHT	TENSILE	BARB SPACING	REELS / PALLET
300101	High Tensile	1.57 mm	1.47 mm	500 m	Heavy	25 kg	High	100 mm	48
300105	High Tensile	1.80 mm	1.47 mm	500 m	Heavy	30 kg	High	100 mm	36
300107	High Tensile	2.00 mm	1.80 mm	500 m	Heavy	38 kg	High	100 mm	27
300110	IOWA	2.50 mm	2.00 mm	400 m	Heavy	44 kg	Soft	100 mm	27
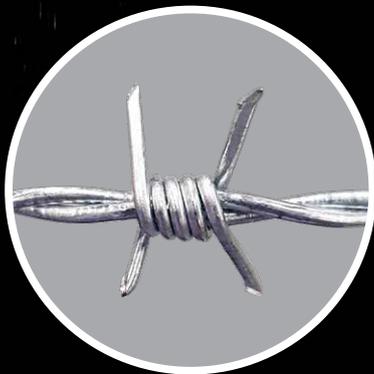
30010 – HIGH TENSILE

300110 – IOWA

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

FENCING & TRELLIS WIRE

GalMAX Fencing offers a complete range of heavily galvanised Fence & Trellis Wire for the Australian farmer. GalMAX Fencing Fence & Trellis Wire is coiled in Australia on world class machinery to suit Australian wire spinners and is guaranteed to give trouble free pay off.

All wires are heavily galvanised for extended life.

FENCING WIRE

CODE	WIRE DIAMETER	LENGTH	WEIGHT	GAL. COATING	TENSILE	RECOMMENDED TENSION	COILS / BUNDLE
300235	4.00 mm	500 m	49 kg	Heavy	Soft	1.8 kN	10
300230	3.15 mm	750 m	47 kg	Heavy	Soft	1.2 kN	10
300220	2.50 mm	1500 m	58 kg	Heavy	Soft	1.0 kN	10
300205	2.00 mm	2000 m	52 kg	Heavy	Soft	-	10
300225	2.80 mm	1000 m	48 kg	Heavy	High	2.0 kN	10
300210	2.50 mm	1500 m	58 kg	Heavy	High	1.8 kN	10
300215	2.50 mm	1500 m	58 kg	Heavy	Medium	1.3 kN	10
300201	1.60 mm	3000 m	46 kg	Heavy	High	-	10
300335	5.20 mm	400 m	43 kg	White PVC	-	-	5
300350	2.50 mm	1000 m	39 kg	Electric Fence	Medium	-	5

TRELLIS WIRE

CODE	WIRE DIAMETER	LENGTH	WEIGHT	GAL. COATING	TENSILE	RECOMMENDED TENSION	COILS / BUNDLE
300900	1.80 mm	2000 m	40 kg	Heavy	High	-	10
300901	2.00 mm	2000 m	49 kg	Heavy	High	1.0 kN	10
300905	2.65 mm	1000 m	43 kg	Heavy	High	2.0 kN	10
300910	2.85 mm	1000 m	50 kg	Heavy	High	2.2 kN	10
300915	3.15 mm	1000 m	61 kg	Heavy	High	3.1 kN	10

Austral Wire Products are made to Australian Standards AS 2423-2002 and zinc coated to AS/NZS 4534-2006

100% Australian
Family Owned Company

GalMAX FENCING

MORE GAL – MORE LIFE!

PHONE 1300 384 981

Admin: (02) 9756 6300

Email: sales@galmax.com.au

Factory: 15 Oatley Close, Blacktown NSW 2148

Postal: PO BOX 6709, Wetherill Park NSW 2164

www.galmax.com.au

Manufactured by
Austral Wire Products
Sydney, Australia   A.B.N. 50 074 508 213